

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	200LL		Rated Output	37 kW 50 HP			
Type	HS		Number of Poles	6			
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load	64.1 A 74.2 A 128.1 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	650 %	650 % 650 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load 92.5 %				
Motor Location	☒ Indoor ☐ Outdoor		75% Load 93.5 %				
Altitude	Less than 1000 meter		100% Load 93.0 %				
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load 0.715				
Duty Type	Continuos (S1)		75% Load 0.790				
Service Factor	1.15		100% Load 0.815				
Mounting	☒ B3 ☐ B5 ☐ V1 ☐ B3/B5		Speed at Full Load 1175 r.p.m				
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	6313ZC3 / 6211ZC3	Full Load 30.7 kg·m				
	Lubricant	Grease(Gadus S2 V100 2)	Locked-rotor** 170 %				
External Thrust	Not applicable		Breakdown** 220 %				
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)				
Shaft Extension	☒ Single ☐ Double		Load(Max.) 63.250 kg·m²				
Terminal	Main	☐ Steel ☒ Cast Iron	Motor 0.781 kg·m²				
Box	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)				
	Location	Refer to Outline Drawing	72 dB(A)				
Application			Vibration 2.2 mm/sec (r.m.s)				
Area classification	Non-Hazardous		Permissible number of				
Type of Ex-Protection	Not applicable		consecutive starts Cold 3 times				
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)		Hot 2 times				
ACCESSORIES			Paint Munsell No. 4.0PB5.4/5.5(VL-451)				
			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3	227B2000AB11	320 kg		
			B5	227B1941CB02	350 kg		
			V1	227B1942CB02	350 kg		
			B3/B5	227B1941PB02	350 kg		
			Main T-Box Ass'y	227B8003CB5			
SPARE PARTS			REMARK				
			High Efficiency				
			* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.


** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HS
Full Load Torque	:	30.7 Kg.m
Motor moment of Inertia (J)	:	0.470 Kg.m ²
Load moment of Inertia (J)	:	63.250 Kg.m ²

37 kW		6 P		60 Hz	
Speed at Full Load :				1175 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	64.1A	74.2A	128.1A		

SPEED VS TORQUE & CURRENT CURVE

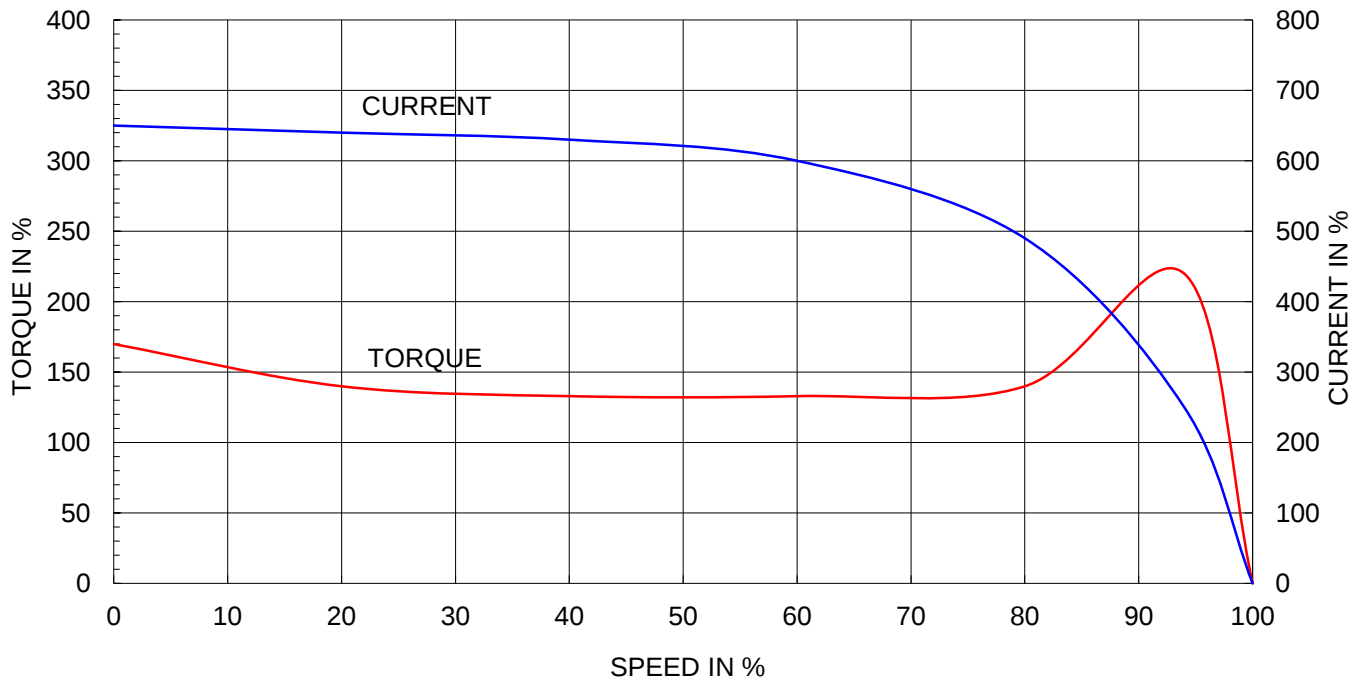

OUTPUT VS EFF., P.F & CURRENT CURVE

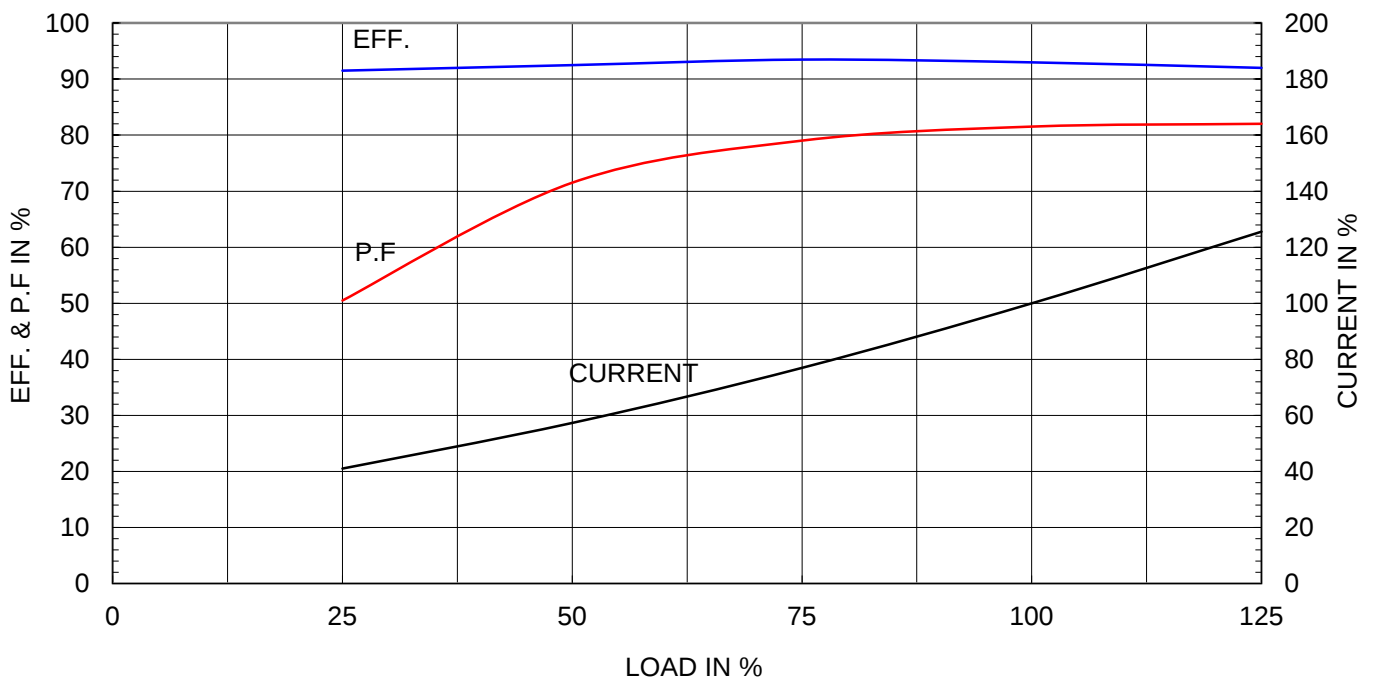




HEAVY INDUSTRIES CO., LTD.

TEFC**THREE PHASE INDUCTION MOTOR****TYPE**


HL, HS

CAST IRON FRAME

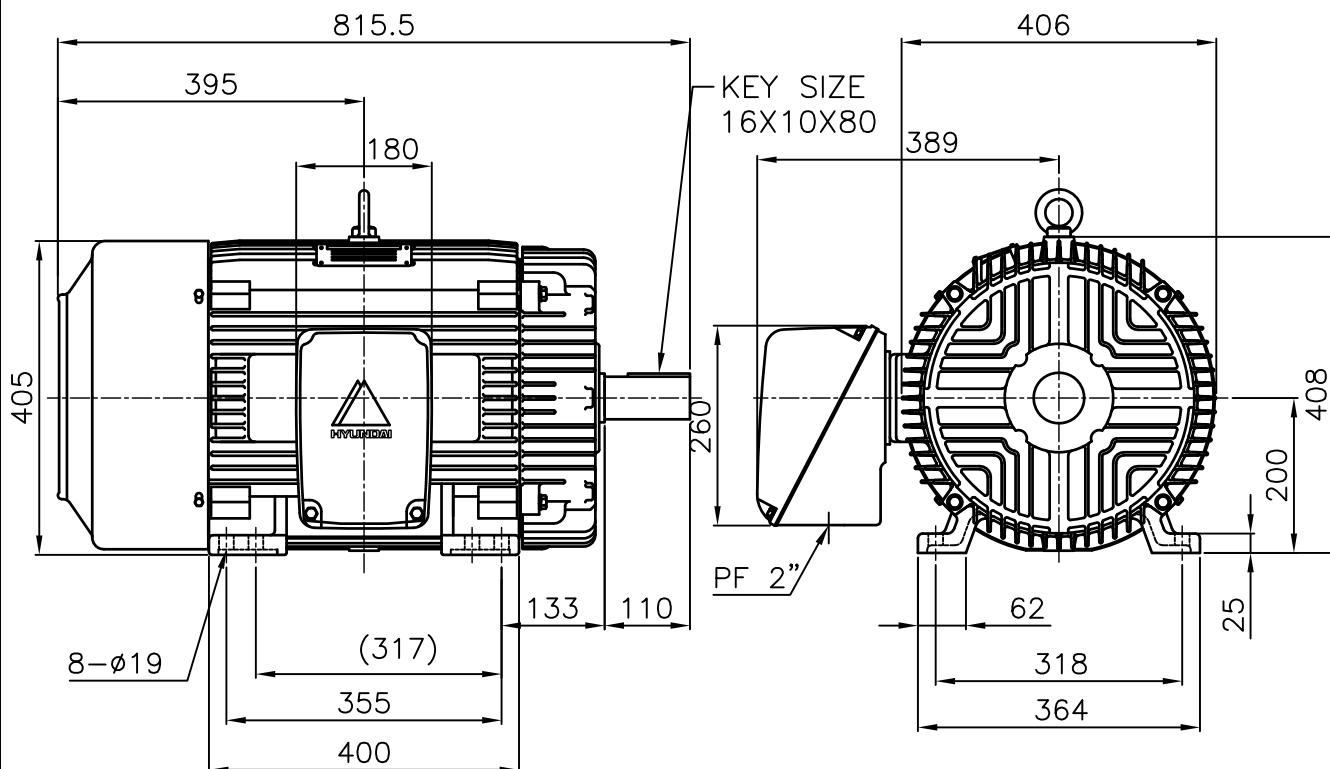**NOTE**

1.TOLERANCE :


CENTER HEIGHT	200 ⁺⁰ _{-0.5}
BASE HOLES	$\phi 19$ ^{+0.43} ₋₀
SHAFT DIAMETER	$\phi 55$ ^{+0.030} _{+0.011}
KEYWAY WIDTH	16 ⁺⁰ _{-0.043}
KEYWAY DEPTH	6 ⁺⁰ _{-0.2}



* STEEL CONDUIT BOX

APPD BY	J. H. KIM	UNIT	mm	SUBJECT	KS 200LL 2P	CAD PROJ \ FILE
CHKD BY	K. S. LEE	SCALE	1/10	TITLE	OUTLINE	XSDNKS\B2000AB09
CHKD BY	I. K. KIM	PROJEC'N	3rd Angle	REF. NO	B2000AB11	Sheet No. of
DSND BY	S. M. KIM	DATE	2002.10.27	DWG NO	227B2000AB11	Revision No. 0

**HYUNDAI**
HEAVY INDUSTRIES CO., LTD.
Electro-Electric System Division

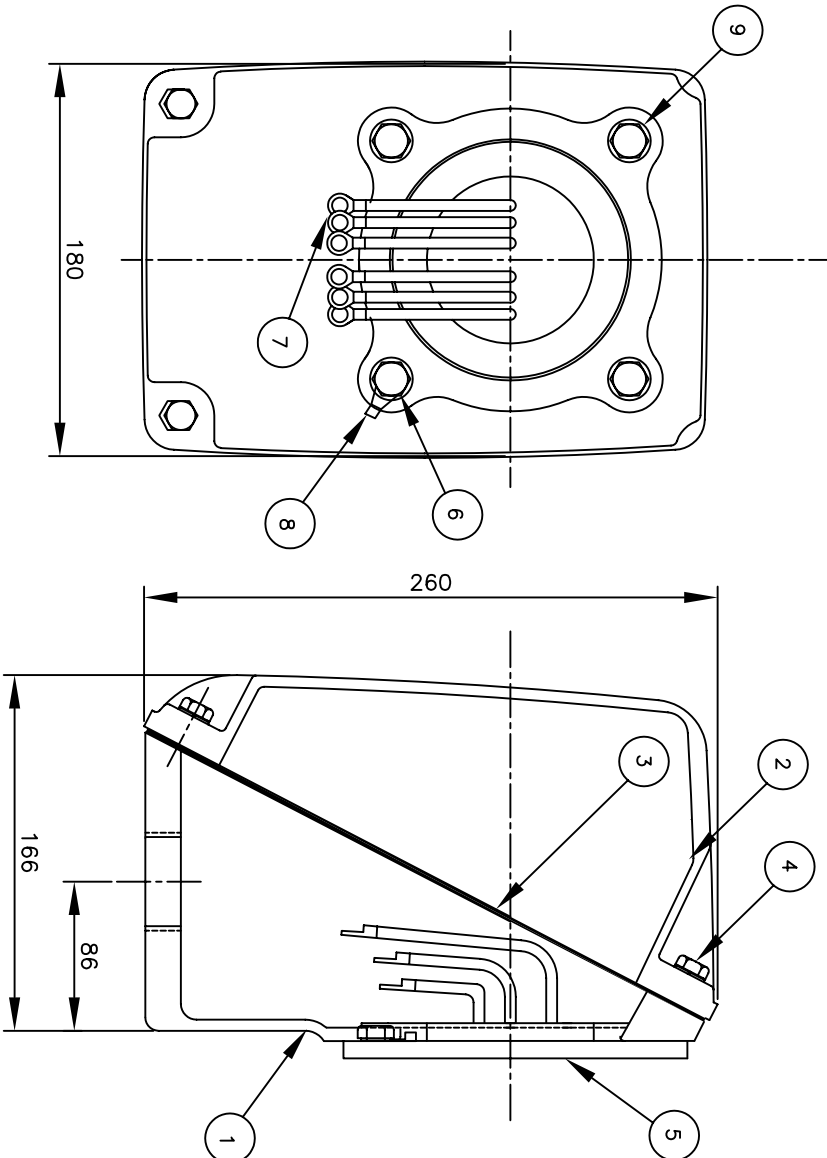

PT	DESCRIPTION	MATERIAL	DIMENSION	Q.TY
1	CONDUIT BOX	FC20		1
2	C/B COVER	FC20		1
3	GASKET(COVER)	N.B.R	T2X170X210	1
4	SCREW(COVER)	S45C	MBXL20	4
5	GASKET(C/B)	N.B.R		1
6	SCREW(C/B)	S45C	MBXL20	4
7	TERMINAL LUG	CU	T1.6	
8	TERMINAL GROUND	CU	T1.6	1
9	WASHER	S45C	M8 X L10	4

QTY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	KIM JIN HONG	UNIT	MM				
CHKD BY	KIM YU SUNG	SCALE	1/2				
CHKD BY	GO SECK HAN	PROJEC'N	3-4 (3rd Angle)				
DSND BY	LEE KWANG SOO	DATE	94.12.20				
TITLE				REF. NO	B8003CB5	Sheet No.	of
CONDUIT BOX & COVER ASS'Y				DWG NO	227B8003CB5	Revision No.	0

