

AC INDUCTION MOTOR DATA SHEET


Model No.or RFQ No.		Item No.		Rev. No. [0]		
Project Name		Project No.		Quantity sets		
GENERAL SPECIFICATION			PERFORMANCE DATA			
Frame Size	250M		Rated Output	90 kW 120 HP		
Type	HS-90/4		Number of Poles	4		
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage		
Method of Cooling	IC411(FC)		Starting Method*	<input checked="" type="checkbox"/> D.O.L <input checked="" type="checkbox"/> Y- Δ		
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V	
Number of Phases	3		Current	Full Load	144.5 A 167.3 A 288.9 A	
Insulation Class	<input checked="" type="checkbox"/> F <input type="checkbox"/> B <input type="checkbox"/> H			Locked-rotor**	670 % 670 % 670 %	
Temp. Rise at full load (by resistance method)			Efficiency			
at 1.0 S.F 80 deg. C			50% Load 94.2 %			
Motor Location <input checked="" type="checkbox"/> Indoor <input type="checkbox"/> Outdoor			75% Load 94.6 %			
Altitude Less than 1000 meter			100% Load 94.5 %			
Relative Humidity Less than 80 %			Power Factor(p.u)			
Ambient Temp. 40 deg. C (Max.)			50% Load 0.830			
Duty Type Continuous (S1)			75% Load 0.860			
Service Factor 1.15			100% Load 0.865			
Mounting <input checked="" type="checkbox"/> B3 <input type="checkbox"/> B5 <input type="checkbox"/> V1 <input type="checkbox"/> B3/B5			Speed at Full Load 1785 r.p.m			
Bearing	Type	Anti-Friction		Torque		
	DE/N-DE	6316C3 / 6313C3		Full Load 49.1 kg·m		
	Lubricant	Grease(Gadus S2 V 100 2)		Locked-rotor** 150 %		
External Thrust Not applicable			Breakdown** 230 %			
Coupling Method <input checked="" type="checkbox"/> Direct <input type="checkbox"/> V-Belt			Moment of Inertia (J)			
Shaft Extension <input checked="" type="checkbox"/> Single <input type="checkbox"/> Double			Load(Max.) 63.525 kg·m ²			
Terminal Box	Main	<input type="checkbox"/> Steel <input checked="" type="checkbox"/> Cast Iron		Motor 1.940 kg·m ²		
	Aux.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		Sound Pressure Level (No-load & mean value at 1m from motor)		
	Location	Refer to Outline Drawing		82 dB(A)		
Application			Vibration 2.2 mm/sec (r.m.s)			
Area classification Non-Hazardous			Permissible number of consecutive starts			
Type of Ex-Protection Not applicable			Cold 3 times			
Applicable Standard KS,IEC,NEMA MG1 Part30(Vpeak)			Hot 2 times			
			Paint	Munsell No.	4.4PB5.5/5.6(VL-451)	
ACCESSORIES			SUBMITTAL DRAWING			
			Outline Dimension Drawing \ Motor Weight(Approx.)			
			B3	TJ5MAP51	530 kg	
					kg	
					kg	
					kg	
					kg	
			Main T-Box Ass'y	3M-016882		
SPARE PARTS			REMARK			
			High Efficiency			
			*, For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise			
			Date	DSND	CHKD	
			2010-05-28	R.G. KIM	O.J. KIM	
				CHKD	APPD	
				J.H. KIM	K.J. KANG	

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shall be maker standard, if not mentioned.
 * In case of Inverter-Fed Motor, performance data is based on sine wave tests.
 ** Data is based on when the motor is supplied at rated voltage & frequency, and the data is expressed as a percentage of full-load value.


Type	:	HS
Full Load Torque	:	49.1 Kg.m
Motor moment of Inertia (J)	:	1.940 Kg.m ²
Load moment of Inertia (J)	:	63.525 Kg.m ²

90 kW	4 P	60 Hz	
Speed at Full Load :		1785 RPM	
Rated Voltage	440V	380V	220V
Full Load Current	144.5A	167.3A	288.9A

SPEED VS TORQUE & CURRENT CURVE

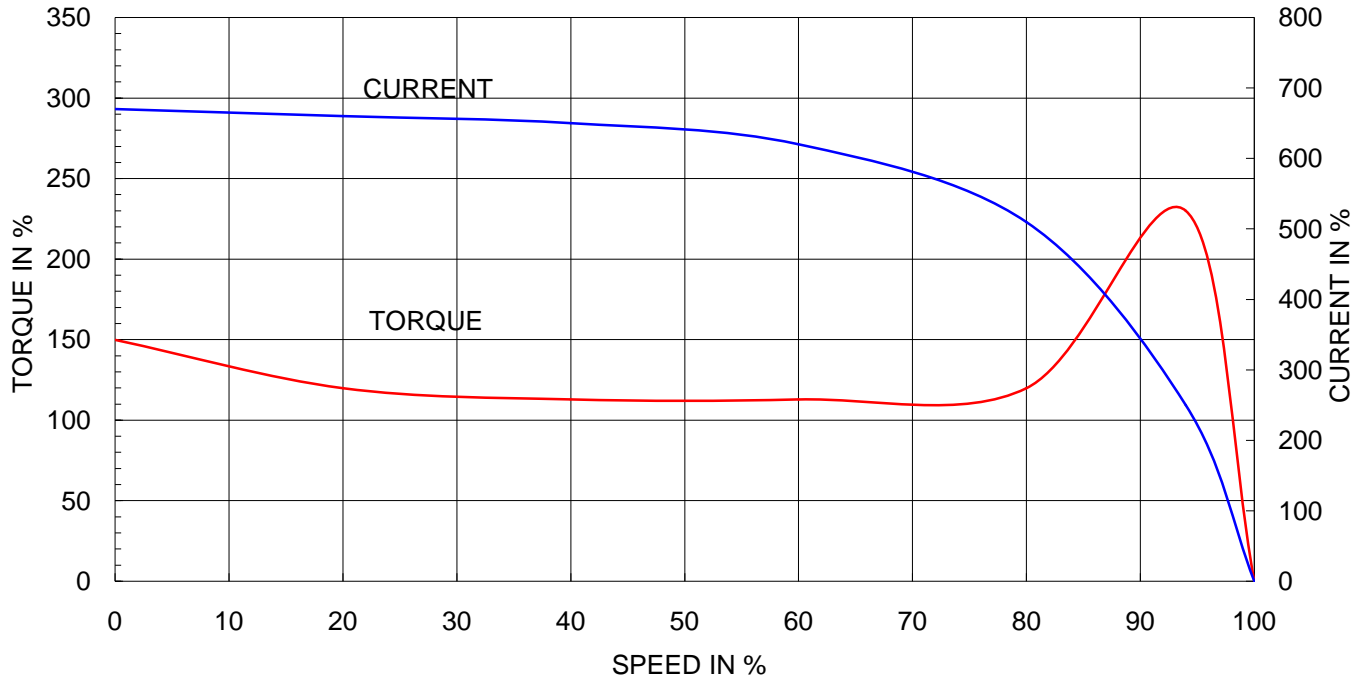


OUTPUT VS EFF., P.F & CURRENT CURVE

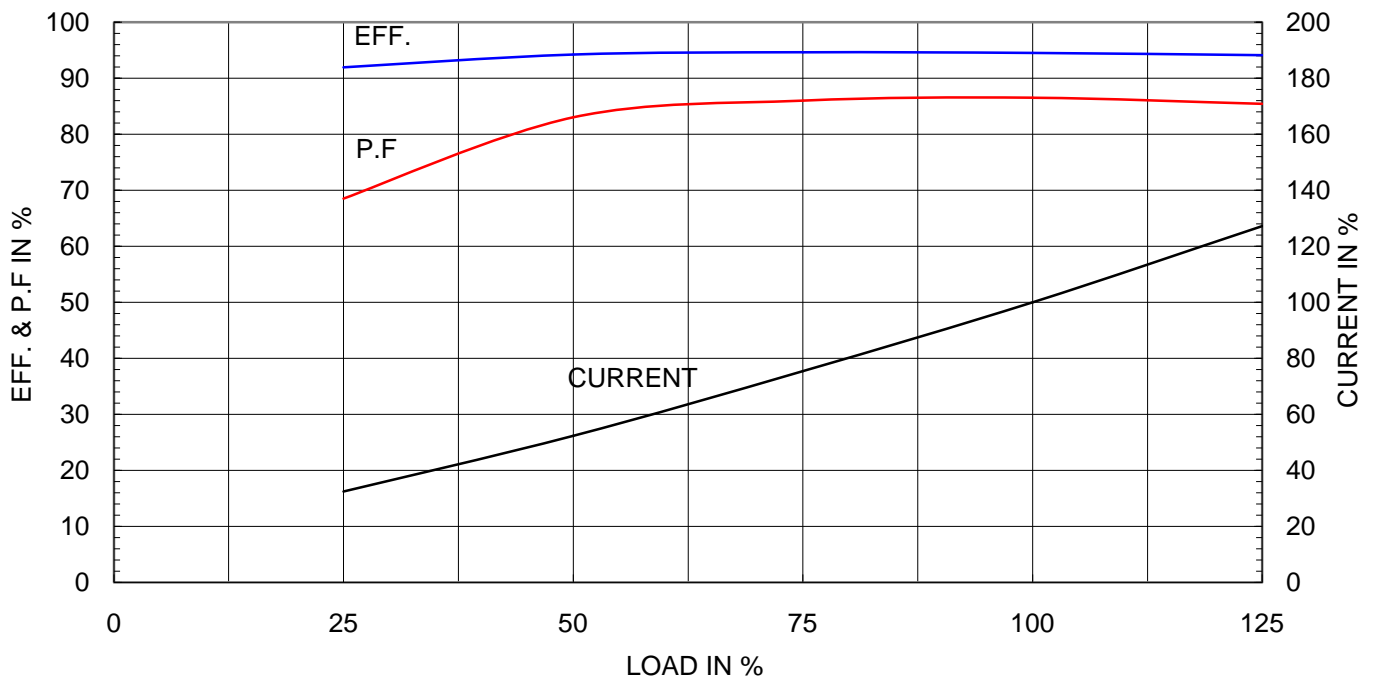

본 도면은 현대중공업(주) 재산이므로
허가없이 복사할 수 없습니다 (취급유의)

THIS DRAWING IS PROPRIETARY TO HHI. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HHI.

		<h1>TEFC</h1>		TYPE (1) TNB , TDB CAST IRON FRAME
		THREE PHASE INDUCTION MOTOR		

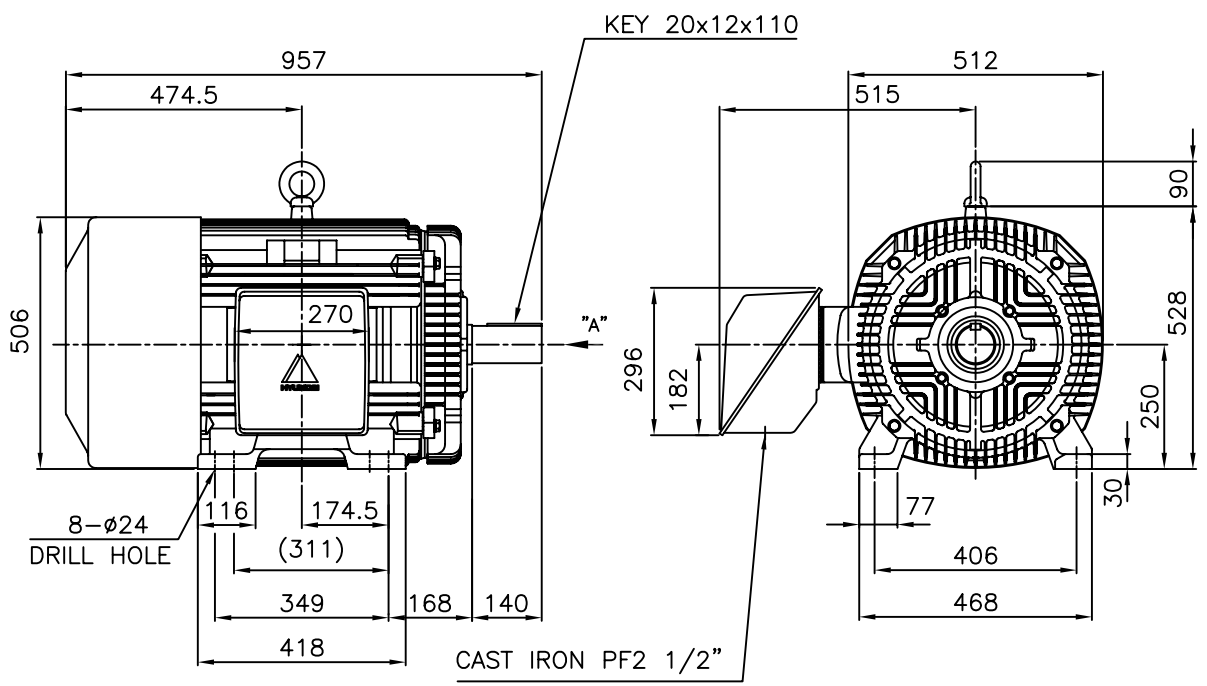


NOTE

1. TOLERANCE :

CENTER HEIGHT	250	$\begin{matrix} 0 \\ -0.5 \end{matrix}$
BASE HILE	$\phi 24$	$\begin{matrix} +0.43 \\ 0 \end{matrix}$
SHAFT DIAMETER	$\phi 75$	$\begin{matrix} +0.030 \\ +0.011 \end{matrix}$
KEYWAY WIDTH	20	$\begin{matrix} -0.022 \\ -0.074 \end{matrix}$
KEYWAY DEPTH	7.5	$\begin{matrix} +0.2 \\ 0 \end{matrix}$
KEY WIDTH	20	$\begin{matrix} 0 \\ -0.052 \end{matrix}$
KEY HEIGHT	12	$\begin{matrix} 0 \\ -0.110 \end{matrix}$

2. The type (1) - "TNB , TDB" is for HHI's standard products and it can be changed for customer's requirements or detail designing.



VIEW "A"
SCALE 4/1



TEFC STANDARD

CAD PROJ \ FILE
MMSTDMTR/TJ5MAP51

APPD BY	KANG K.J.	UNIT	MM
CHKD BY	KIM O.J.	SCALE	1/15
CHKD BY	LEE N.D.	PROJEC'N	3rd Angle
DSND BY	KIM RYANG GYU	DATE	2007.03.23

SUBJECT	KS Fr.250M TEFC
TITLE	OUTLINE THREE-PHASE INDUCTION MOTOR

REF. NO	L2-Series	Sheet No. of
DWG NO	TJ5MAP51	Revision No. 0

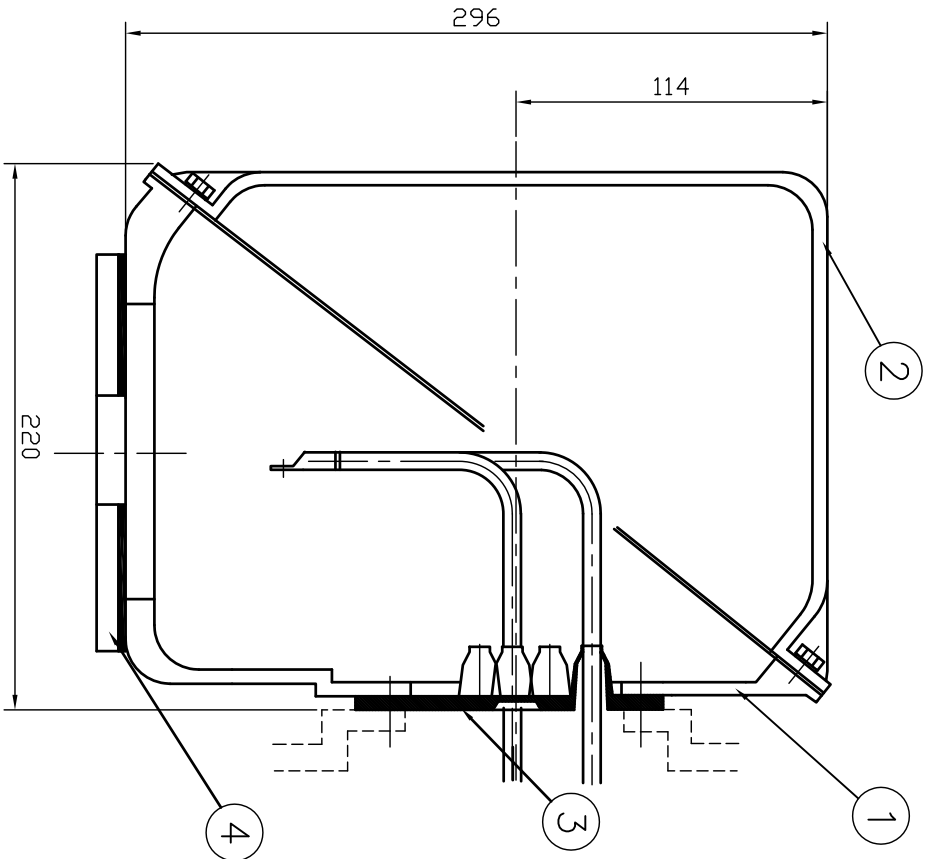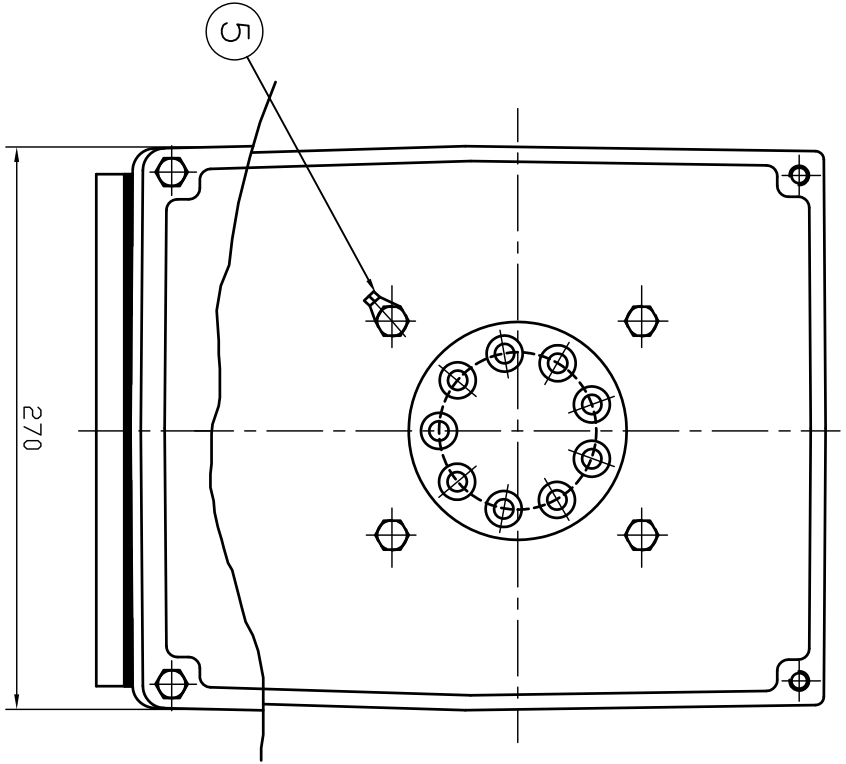

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	Q.P. CHK	APP'D BY
1						
2						
3						
4						

QTY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
1	EARTH TERMINAL LUG						5
1	CABLE ENTRY PLATE						4
1	GASKET	NBR					3
1	TERMINAL BOX COVER	CAST IRON					2
1	TERMINAL BOX BODY	CAST IRON					1

APP'D BY	권진오	UNIT	MM
Q.P. CHK	주영철	SCALE	NONE
CHK'D BY	권오철	PROJEC'N	3 권(3rd Angle)
DSND BY	김헌태	DATE	92.06.05

REF. NO	DWG NO	3M-016882
TITLE	TERMINAL BOX ASS'Y (CAST IRON)	
SUBJECT	HLA6 - 250,280Fr.	
CAD PROJ	FILE	T-BOX-M\38016882

REF. NO	DWG NO	3M-016882
TITLE	TERMINAL BOX ASS'Y	
SUBJECT	HLA6 - 250,280Fr.	
CAD PROJ	FILE	T-BOX-M\38016882

